


PUSH PLATE EXIT RELEASE STATIONS

FOR ACCESS CONTROL APPLICATIONS



- **NARROW STYLE**
- **T STYLE**
- **SINGLE GANG STYLE**
- **COLOR FILLED ENGRAVED LEGENDS**
- **HEAVY DUTY SOLID ALUMINUM PLATES**
- **ANODIZED TO INHIBIT CORROSION**
- **VANDAL RESISTANT MOUNTING**
- **PNEUMATIC TIME DELAY SWITCH MODELS**
- **SINGLE POLE AND DOUBLE POLE SWITCH MODELS**
- **FIVE ARCHITECTURAL FINISHES**
- **CUSTOM ENGRAVING AVAILABLE**

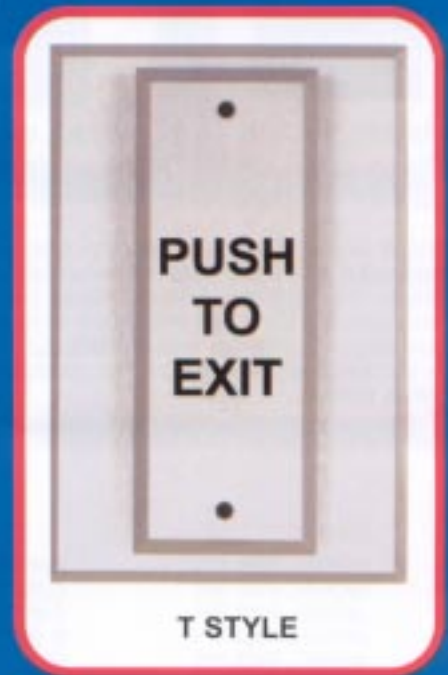

ALARM CONTROLS CORPORATION
DEER PARK, NEW YORK
11729

PUSH PLATE ACCESS CONTROL EXIT RELEASE STATIONS



MODEL PS1-513



MODEL PN1-221



MODEL PS1-613



MODEL PN1-331



MODEL PS1-443

SPECIFICATION GUIDE

PUSH PLATE EXIT RELEASE STATION SHALL BE MANUFACTURED BY ALARM CONTROLS CORPORATION. PUSH PLATE EXIT RELEASE STATIONS SHALL BE MOMENTARY OR LATCHING. S.P.D.T OR D.P.D.T., 4A. @ 28VDC. PNEUMATIC TIME DELAY PUSH PLATES SHALL BE FIELD ADJUSTABLE FROM 2 TO 60 SECONDS WITH ONE N/O AND ONE N/C CONTACT RATED 10A. @ 120 VAC. ALL SWITCH ASSEMBLIES SHALL BE PROVIDED WITH 10 INCH COLOR CODED WIRE LEADS. PUSH PLATES SHALL BE CONSTRUCTED OF MACHINE ANODIZED ALUMINUM WITH CONCEALED VANDAL RESISTANT MOUNTING. MOUNTING SCREWS SHALL BE ALLEN HEAD TYPE WITH A SUITABLE HEX KEY PROVIDED. SINGLE GANG STYLE AND T STYLE PUSH PLATES MOUNT TO STANDARD RECESSED ELECTRICAL WALL BOXES.

MODELS

NARROW STYLE

MODEL PN1-111
MODEL PN2-111
MODEL PN3-111
MODEL PN4-111
MODEL PN5-111

SWITCH DESCRIPTION

S.P.D.T. MOMENTARY CONTACTS, RATED 4 A. @ 28 VDC
D.P.D.T. MOMENTARY CONTACTS, RATED 4 A. @ 28 VDC
S.P.D.T. LATCHING CONTACTS, RATED 4 A. @ 28 VDC
D.P.D.T. LATCHING CONTACTS, RATED 4A. @ 28 VDC
PNEUMATIC TIME DELAY, TIME RANGE 2-60 SECONDS, 1 N/O & 1 N/C CONTACT, CONTACTS RATED 10A. @ 35 VDC

T STYLE

MODEL PT1-111
MODEL PT2-111
MODEL PT3-111
MODEL PT4-111
MODEL PT5-111

S.P.D.T. MOMENTARY CONTACTS, RATED 4 A. @ 28 VDC
D.P.D.T. MOMENTARY CONTACTS, RATED 4 A. @ 28VDC
S.P.D.T. LATCHING CONTACTS, RATED 4A. @ 28 VDC
D.P.D.T. LATCHING CONTACTS, RATED 4A. @ 28 VDC
PNEUMATIC TIME DELAY, TIME RANGE 2-60 SECONDS, 1 N/O & 1 N/C CONTACT, CONTACTS RATED 10A. @ 35 VDC

SINGLE GANG STYLE

MODEL PS1-111
MODEL PS2-111
MODEL PS3-111
MODEL PS4-111
MODEL PS5-111

S.P.D.T. MOMENTARY CONTACTS, RATED 4A. @ 28 VDC
D.P.D.T. MOMENTARY CONTACTS, RATED 4A. @ 28 VDC
S.P.D.T. LATCHING CONTACTS, RATED 4A. @ 28VDC
D.P.D.T. LATCHING CONTACTS, RATED 4A. @ 28 VDC
PNEUMATIC TIME DELAY, TIME RANGE 2-60 SECONDS, 1 N/O & 1 N/C CONTACT, CONTACTS RATED 10A. @ 35 VDC

ALL STANDARD MODELS ARE CLEAR ANODIZED, ENGRAVED "PUSH TO EXIT", BLACK FILL, (AS SHOWN ON FRONT)

FINISH		ENGRAVING		FILL	
CLEAR	1	PUSH TO EXIT	1	BLACK	1
BRONZE	2	PUSH TO OPERATE	2	RED	2
BRASS	3	PUSH TO OPEN	3	WHITE	3
BLUE	4	ADA SYMBOL	4	BLUE	4
BLACK	5				
RED	6				

HOW TO ORDER

SELECT A MODEL AND SUBSTITUTE THE OPTION NUMBERS TO OBTAIN THE REQUIRED PART NUMBER.

FOR EXAMPLE: SINGLE GANG STYLE WITH D.P.D.T. MOM. SW., BRASS FINISH, "PUSH TO OPERATE", RED FILL.

MODEL	FINISH	ENGRAVING	FILL
PS2	3	2	2
PART NUMBER PS2-322			

ALARM CONTROLS CORPORATION

IF YOU NEED IT, WE WILL MAKE IT

"QUALITY SECURITY EQUIPMENT SINCE 1971"

19 BRANDYWINE DRIVE, P.O. BOX 280, DEER PARK, NEW YORK 11729
1 800 645-5538 631 586-4220 FAX 631 586-6500
EMAIL: INFO@ALARMCONTROLS.COM WWW.ALARMCONTROLS.COM