



CASE

CASE WESTERN RESERVE UNIVERSITY

Drawing Name:

Card Access Door — Standard Wire Usage


Drawn By:

CFV

Date

4/7/04

Card Reader — 8/22 Shielded

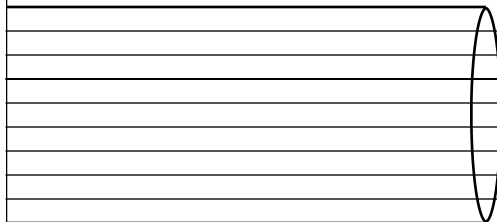


- RED— +VDC
- BLACK— -VDC
- WHITE— DATA *
- GREEN— DATA *
- BLUE— LED
- BROWN— BEEP
- YELLOW— TAMPER
- ORANGE— TAMPER

- * LITTON CONVERSIONS— GREEN = DATA 1 WHITE = DATA 0
- * NEW INSTALLATIONS— GREEN = DATA 0 WHITE = DATA 1


WHEN USING THE MR-10-OT READER—ORANGE & YELLOW ARE SPARES

Peripheral Devices — 12/22

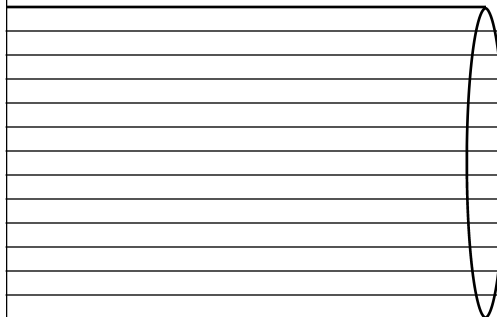

- RED— RQE +VDC
- BLACK— RQE -VDC
- GREEN— DOOR CONTACT
- WHITE— DOOR CONTACT
- BLUE— REX CONTACT
- BROWN— REX CONTACT
- YELLOW— PIEZO +VDC
- ORANGE— PIEZO -VDC
- VIOLET— SPARE
- SLATE— SPARE
- PINK— SPARE
- TAN— SPARE

Mag Locks — 18/4

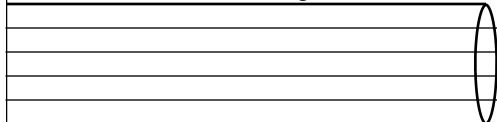

- RED— LOCK +VDC
- BLACK— LOCK -VDC
- GREEN— SPARE
- WHITE— SPARE